

# Capote

Made in America Yarns  
X

## Cabled Yoke Mini Poncho

**Materials:** Made in America Yarns - American Lamb Bulky - 4, (5) skeins  
**Gauge:** 14 sts, 18.5 rows = 4" in st st and 2x2 ribbing (slightly stretched)  
20 sts = 4" in Cable Pattern  
14 sts = 4" in seed stitch  
**Needles:** Size 10 (6mm), or size needed to obtain gauge above  
**Size:** XS/S, (M/L, L/XL)  
Circumference: 43", (45.75, 51.5)\*\*  
Length: 16", (16.5, 16.5)  
\*\* To determine which size to make, measure the circumference of your body at the shoulders and add 1"-3" to this measurement. Choose the size that is closest to this measurement.

*Pattern is written for smallest size, with larger sizes in parenthesis. If only one number is given, it applies to all sizes.*

### Cabled Yoke

With size 10 needles, Cast on 26 sts. Purl one row

Row 1 (RS): P2, (k2, C4F, p2)3x.  
Row 2: K2, (p6, k2)3x.  
Row 3: (P2, C4B, k2)2x, p1, turn.  
Row 4: K1, (p6, k2)2x.  
Row 5: P2, (k2, C4F, p2)2x, C4B, k2, p2.  
Row 6: Same as row 2.  
Row 7: Same as row 3.  
Row 8: Same as row 4.  
Row 9: Same as row 1.  
Row 10: Same as row 2.  
Row 11: P2, (C4B, k2, p2)3x.  
Row 12: Same as row 2.

Repeat these 12 rows 17, (18, 20) times total.



The shorter side will measure approximately 27.75", (29.5, 32.75).

The longer side will measure approximately 44", (46.75, 52.5).

Bind off Row (RS): BO while working the sts as follows: P2, [k1, (k2tog)2x, k1, p2] 3x., do not cut yarn on last st.

### Neck Ribbing

With RS facing, where yarn is still attached, pick up and k96, (101, 113) sts along the short end of the scarf—97, (102, 112) sts on the needle.

Row 1 (WS): P2, \*k3, p2; rep from \* across.

Row 2: K2, \*p3, k2; rep from \* across.

Row 3: P2, \*k2tog, k1, p2; rep from \*

Designed by Vanessa Ewing for  
Made in America Yarns  
[www.madeinamericayarns.com](http://www.madeinamericayarns.com)

across. 78, (82, 90) sts.

Rows 4, 6: K2, \*p2, k2; rep from \* across.

Rows 5 and 7: P2, \*k2, p2; rep from \* across.

BO all sts in rib on next row.

### Body

Overlap and pin the first and last 1" of the cabled yoke along the longer side, this will be the button placket.

With RS facing, pick up and k4 sts through 2 layers along this 1", then pick up and k146, (156, 176) sts around the entire longer side of the cabled yoke (Pick up at a rate of approximately 3 sts for every 4 rows.) 150, (160, 180) sts total.

Place st marker to mark beg of rnd.

Made in America Yarns  
X

Work in st st in the rnd (which is k every rnd) for 7.5", (8, 8) from pick up edge.

Next Rnd: (remove beg of rnd m) K37, (40, 45) sts, place new beg of rnd m. *Moving the marker will prevent a "jog" in the seed stitch edging from happening at the center front of the poncho.*


### Seed Stitch Edge

Rnd 1: \*K1, p1; rep from \* around.

Rnd 2: \*P1, k1; rep from \* around.

Rep these 2 rnds until seed stitch measures 2".

BO all sts on next rnd.

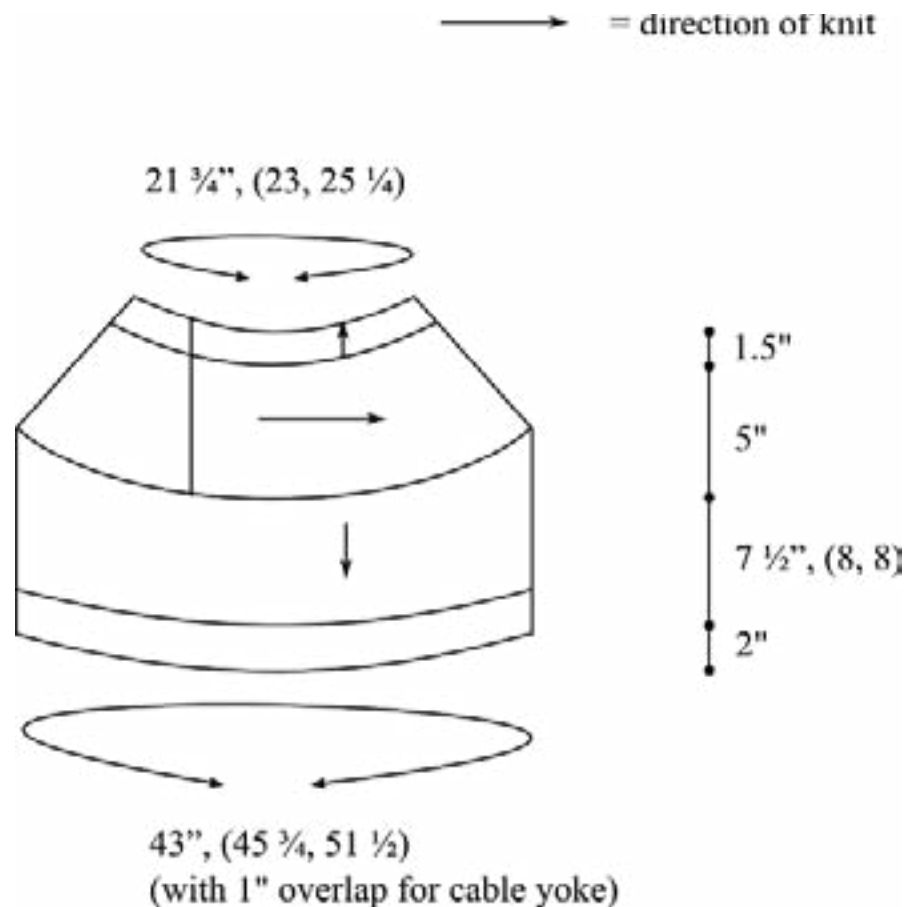

### Finishing

Block to measurements.

Sew 4 buttons- one for each cable of the yoke and one more for the top rib.

Buttonholes are not necessary since the buttons can poke through the cable twist and rib sts.

Weave in all ends.

Designed by Vanessa Ewing for  
Made in America Yarns  
www.madeinamericayarns.com